



Key Facts:

Alumasc has a unique and comprehensive portfolio of roofing product systems, which encompass the full range of materials and components required for a complete standing seam roof system.

Coverage:

Alumasc supply building products throughout the UK and Europe.

Installation & Training:

Only Latchways trained personnel are permitted to install the Constant Force post and ManSafe componentry. Following installation, Latchways will arrange for the system to be tested, certified and tagged prior to use.

Familiarisation training for the building owner is available, as is an annual inspection programme, thus ensuring that the system is correctly maintained and complies with European safety standards.

For details of approved installers, ongoing advice and support services contact Latchways on +44 (0) 1380 732700.

Technical Considerations:

Armaseam is a standing seam metal roofing system based on the tried and tested principle of zip-up roofing. The panels are roll formed from continuous strip coil to any required length, and then mechanically seamed together onto secret-fix halters. The result is an integral roof covering that has no joints or end laps and which is quick to install. Available in aluminium, copper, stainless steel, coated steel and zinc materials in standard widths of 300 mm and 400 mm.


Should you require a system on the AS 300/65 zinc/copper, or AS 400/65 zinc/copper roof profiles, please contact Latchways technical department on +44 (0) 1380 732700.

Specification details for Alumasc Standing Seam Roofing Systems:

AS 300/65 and AS 400/65

Cover width	End anchor post set*	Intermediate post set	90° Corner post set	Variable corner post set	End anchor post set**	Pendulum post set
300	84001-00	84002-00	84003-00	84004-00	84005-00	84006-00
400	84001-00	84002-00	84003-00	84004-00	84005-00	84006-00

Cable order code: 00900-00 Transfastener order code: 85085-00
 *Standard end anchor post set with tension adjustment on one end. **For extra long spanning lengths use end anchor post set with tension adjustment on both ends. (Refer to page 2:2 for details).

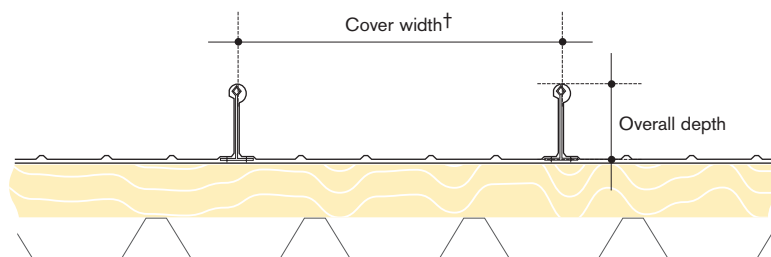

Profiles & widths:

Overall depth	Cover width	Panel name
65	300	AS 300/65
65	400	AS 400/65

The standard colour of the post is Metallic Silver (Trimate paint K903/560/9). Other colours are available to order at additional cost subject to availability and lead time. Contact Latchways technical department for further information.

† Latchways reference to cover width is defined as the width of the fixing points for the Latchways base plate.

Address details:

Alumasc Exterior Building Products Ltd,
 White House Works, Bold Road,
 Sutton, St Helens,
 Merseyside WA9 4JG
 Tel: +44 (0) 1744 648400
 Fax: +44 (0) 1744 648401
 E-mail: info@alumasc-exteriors.co.uk
 Website: www.alumasc-exteriors.co.uk