

### Key Facts:

Significantly the most popular use of Euroclad profiles is in the roof application. The various product strengths and ease of installation lend themselves ideally to almost any roof application.

### Coverage:

Euroclad has over 20 years experience in the UK.

### Installation & Training:

Only Latchways trained personnel are permitted to install the Constant Force post and ManSafe componentry. Following installation, Latchways will arrange for the system to be tested, certified and tagged prior to use.

Familiarisation training for the building owner is available, as is an annual inspection programme, thus ensuring that the system is correctly maintained and complies with European safety standards.

For details of approved installers, ongoing advice and support services contact Latchways on +44 (0) 1380 732700.

### Technical Considerations:

A full range of Corus Colorcoat finishes in pre-coated steel are available for the trapezoidal roof profiles. The trapezoidal roof is recommended for roof pitches greater than or equal to 5°. If the roof pitch is less than 5°, either the SF500 secret fix (for steel) or Euroseam (for aluminium) systems may be used.

Should you require a system on the Euroclad 38/914 roof profile, please contact Latchways technical department on +44 (0) 1380 732700.

For information regarding Euroclad standing seam and SF500 roof profiles, please refer to sections 2 and 5 respectively.




## Specification details for Euroclad Built Up On Site Roofing Systems: 1000/32 F

Cover width	End anchor post set*	Intermediate post set	90° Corner post set	Variable corner post set	End anchor post set**	Pendulum post set
333	82001-00	82002-00	82003-00	82004-00	82005-00	82006-00

Cable order code: 00900-00 Transfastener order code: 85085-00

\*Standard end anchor post set with tension adjustment on one end. \*\*For extra long spanning lengths use end anchor post set with tension adjustment on both ends. (Refer to page 4:2 for details).

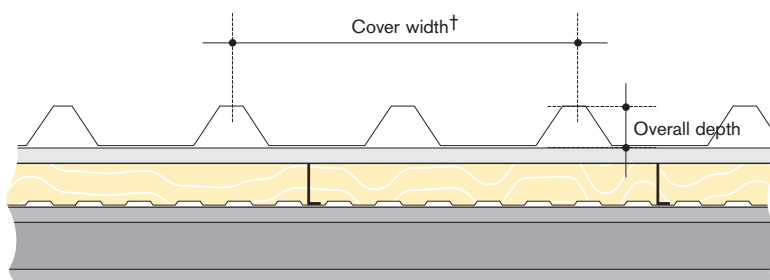

### Profiles & widths:

Overall depth	Cover width	Pitch		Panel name
32	333	166.6		1000/32 F

The standard colour of the post is Goosewing Grey (BS 10-A-05). Other colours are available to order at additional cost subject to availability and lead time. Contact Latchways technical department for further information.

† Latchways reference to cover width is defined as the width of the fixing points for the Latchways base plate.

### Address details:

Euroclad Limited,  
Wentloog Corporate Park,  
Wentloog Road,  
Cardiff CF3 2ER  
Tel: +44 (0) 2920 790722  
Fax: +44 (0) 2920 793149

Euroclad Ireland Ltd,  
Unit 4,  
Newhall Industrial Estate,  
Naas,  
Co. Kildare  
Tel: +353 (0) 45 435470  
Fax: +353 (0) 45 435472  
E-mail: sales@euroclad.com  
Website: www.euroclad.com