

### Key Facts:

Architects and specifiers are increasingly recognising the advantages of the secret fix system which enhances the roof with its clean, uncluttered appearance and eliminates one of the major potential sources of the leaks, through fixings.

### Coverage:

Euroclad has over 20 years experience in the UK.

### Installation & Training:

Only Latchways trained personnel are permitted to install the Constant Force post and ManSafe componentry. Following installation, Latchways will arrange for the system to be tested, certified and tagged prior to use.

Familiarisation training for the building owner is available, as is an annual inspection programme, thus ensuring that the system is correctly maintained and complies with European safety standards.

For details of approved installers, ongoing advice and support services contact Latchways on +44 (0) 1380 732700.

### Technical Considerations:

Developed to function efficiently down to an actual pitch of 1° the SF500 secret fix system has many beneficial features, such as the ability to roll on site.

The SF500 sheet installs to a cover width of 500 mm and is available in the full range of Corus Colourcoat finishes.

Should you require a system on the Euroclad 38/914 profile, please contact Latchways technical department on +44 (0) 1380 732700.

For information regarding Euroclad standing seam and built up on site roof profiles, please refer to sections 2 and 4 respectively.

NB: Only restraint systems are to be used on this roof type. Fall Arrest systems are not compatible at this time, please refer to the Fall Protection chart in section 2 for full details or contact Latchways technical department.




## Specification details for Euroclad Secret Fix Roofing Systems:

### SF500 Secret Fix

Pitch	End anchor post set	Intermediate post set	90° Corner post set	Variable corner post set	Cable	Transfastener
500	87501-00	87502-00	87503-00	87504-00	87505-00	87506-00

Cable order code: 00900-00 Transfastener order code: 85085-00

\*Standard end anchor post set with tension adjustment on one end. \*\*For extra long spanning lengths use end anchor post set with tension adjustment on both ends. (Refer to page 5:2 for details).

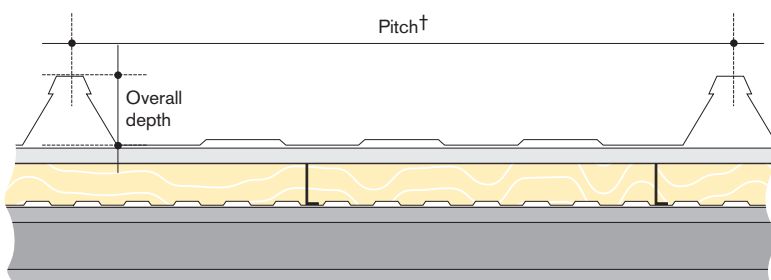

### Profiles & widths:

Overall depth	Pitch	Panel name
55	500	SF500

The standard colour of the post is Metallic Silver (Trimate paint K903/560/9). Other colours are available to order at additional cost subject to availability and lead time. Contact Latchways technical department for further information.

† Latchways reference to pitch is defined as the width of the fixing points for the Latchways base plate.

### Address details:

Euroclad Limited,  
Wentloog Corporate Park,  
Wentloog Road,  
Cardiff CF3 2ER  
Tel: +44 (0) 2920 790722  
Fax: +44 (0) 2920 793149

Euroclad Ireland Ltd,  
Unit 4,  
Newhall Industrial Estate,  
Naas,  
Co. Kildare  
Tel: +353 (0) 45 435470  
Fax: +353 (0) 45 435472  
E-mail: sales@euroclad.com  
Website: www.euroclad.com