

Key Facts:

KeyBEMO® are part of the Bowmer & Kirkland Group of companies. They manufacture three cover widths of standing seam roofing—305 mm, 400 mm and 500 mm, which are produced in aluminium natural stucco embossed, aluminium coated PVF2 ARS or polyester, steel coated plastisol or PVF2, stainless steel, copper and zinc.

Coverage:

KeyBEMO® has a 27 year history worldwide with 17 years experience in the UK and have partners throughout Europe, America, Middle East and Far East.

Installation & Training:

Only Latchways trained personnel are permitted to install the Constant Force post and ManSafe componentry. Following installation, Latchways will arrange for the system to be tested, certified and tagged prior to use.

Familiarisation training for the building owner is available, as is an annual inspection programme, thus ensuring that the system is correctly maintained and complies with European safety standards.

Technical Considerations:

KeyBEMO® profiles 65/305 and 65/400 are classed as self-supporting profiles. Depending on width and gauge, they can be used as single-skin roof coverings, spanning up to 3 m or together with quilt insulating materials if required. The KeyBEMO® profile 65/500 is intended for use as a roof covering on a fully supported substructure. Should you require a system on copper and zinc KeyBEMO® profiles, please contact Latchways technical department on +44 (0) 1380 732700.




Specification details for KeyBEMO® Standing Seam Roofing Systems:

KeyBEMO® 65/305, KeyBEMO® 65/400 and KeyBEMO® 65/500

Cover width	End anchor post set*	Intermediate post set	90° Corner post set	Variable corner post set	End anchor post set**	Pendulum post set
305	84001-00	84002-00	84003-00	84004-00	84005-00	84006-00
400	84001-00	84002-00	84003-00	84004-00	84005-00	84006-00
500	84101-00	84102-00	84103-00	84104-00	84105-00	84106-00

Cable order code: 00900-00 Transfastener order code: 85085-00

*Standard end anchor post set with tension adjustment on one end. **For extra long spanning lengths use end anchor post set with tension adjustment on both ends. (Refer to page 2:2 for details).

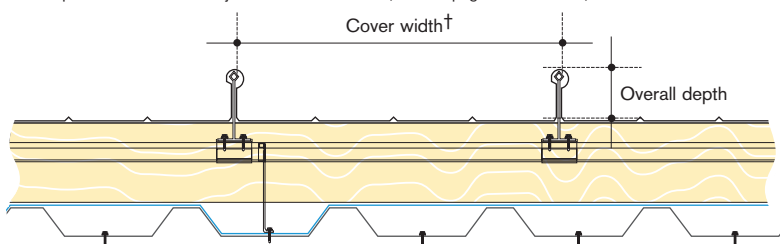

Profiles & widths:

Overall depth	Cover width	Panel name
65	305	KeyBEMO® 65/305
65	400	KeyBEMO® 65/400
65	500	KeyBEMO® 65/500

The standard colour of the post is Metallic Silver (Trimate paint K903/560/9). Other colours are available to order at additional cost subject to availability and lead time. Contact Latchways technical department for further information.

† Latchways reference to cover width is defined as the width of the fixing points for the Latchways base plate.

Address details:

Keybemo,
High Edge Court,
Heage,
Belper,
Derbyshire DE56 2BW
Tel: +44 (0) 1773 853694
Fax: +44 (0) 1773 857599

E-mail: keybemo@bandk.co.uk
Website: www.keybemo.co.uk

For details of approved installers, ongoing advice and support services contact Latchways on +44 (0) 1380 732700.